


LHD Cable Accessory - Bracket “U” with sleeve (ACA-BU06) Alarmline II Series

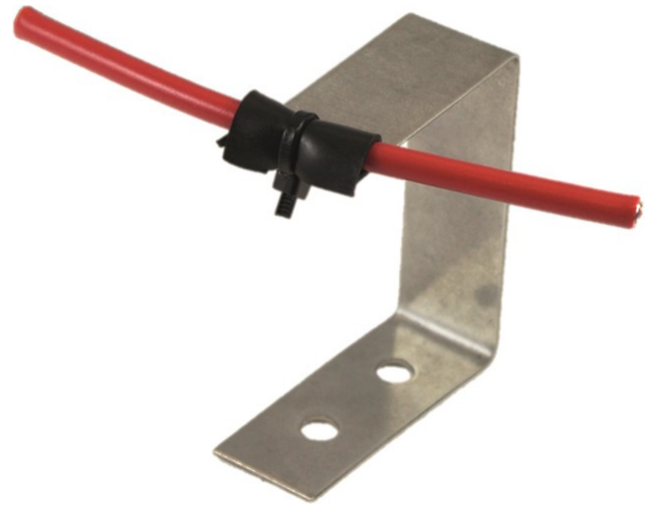

Overview

The ACA-BU06 series U-bracket (channel bracket) is designed to secure linear heat cable to metal surfaces where there is no return edge available to fix a bracket or clip, eg. fixed roof storage tanks. A silicon protection sleeve is supplied with the unit to protect the linear heat cable when fastened to the bracket.

Installation

The ACA-BU06 should be secured in place using suitable bolt and nut at one end. The hole at the other end of the bracket allows for the securing of the sensor cable using a silicone sleeve and cable tie. The U-bracket (channel bracket) supports the sensor cable approximately 60m away from the mounting point.

Recommended spacing: 1m.

Standard Features

- Easy installation of linear heat cable
- For use on metal surfaces eg. fixed roof storage tanks
- Available in zintec or stainless steel
- Available in quantities of 25 or 100



Australia & New Zealand

Phone: 1800 672 171
Outside Australia: +61 3 9518 5588
Email: firesecuritycs@carrier.com
Web: www.kidde.com.au

Head Office

10 Ferntree Place
Notting Hill, Victoria 3168
Australia

© 2020 Carrier. All rights reserved.
Kidde Australia is a Carrier company.

Specifications

	ACA-BU06-025	ACA-BU06-100	ACA-BU06SS-025	ACA-BU06SS-100
Dimensions (H x W x D)	60 x 20 x 50mm			
Weight	850g	3.4kg	580g	2.3kg
Material	Zintec	Zintec	Stainless Steel	Stainless Steel
Quantity	25	100	25	100

Ordering information

Part number	Description
ACA-BU06-025	LHD Cable Accessory - Bracket "U", 60mm, Zintec with Sleeve - Qty 25
ACA-BU06-100	LHD Cable Accessory - Bracket "U", 60mm, Zintec with Sleeve - Qty 100
ACA-BU06SS-025	LHD Cable Accessory - Bracket "U", 60mm, Stainless Steel w/ Sleeve - Qty 25
ACA-BU06SS-100	LHD Cable Accessory - Bracket "U", 60mm, Stainless Steel w/ Sleeve - Qty 100