



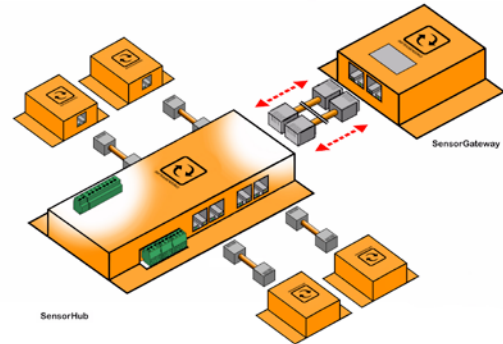

## Sensorhub (EXP-8HUB)

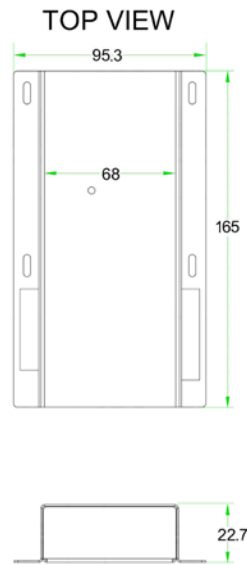

### General Description

Expands the base unit from 2 to 8 ports & adds control capabilities.

### Key Features

- plugs into the base unit w/ max length of 1m (BASE-WIRED).
- powered by the base unit (BASE-WIRED).
- 4 dry contact inputs for 3rd party systems.
- 4 dry contact outputs & 2 relay outputs for automatic control.
- max 1 expansion hub per base unit.

### Technical Specifications

Power Source:	SensorGateway (BASE-WIRED)
Power Usage	588 mW
Expansion ports for external sensor probes	8
Dry contact input ports	4
Dry contact output ports	4 (digital sink 100mA)
Relay outputs	2 (400VAC/150VDC and 200VA/192W)
Auxillary supply	maximum current capacity of 500mA at 9 to 12 VDC

### Environmental and Physical Specification

Operating temperature range	0°C to +75°C (32°F to +167°F)
Operating humidity range	< 90% rH (non-condensating)
Dimensions	165 mm (6.5") x 95 mm (3.7") x 22 mm (0.8")
Weight	0.57 kgs (1.26 lbs.)