

## THE FIRE FIGHTING SYSTEM

- › Easy installation
- › No maintenance
- › 2 dry contacts
- › Door switch contact
- › Manual activation contact
- › Linear heat detection
- › Mains powered
- › Back-up battery
- › LED indicators

## TECHNICAL SPECIFICATIONS

### DIMENSIONS

750 - MM = 303x443x165  
1500 - MM = 418x443x165  
2250 - MM = 580x443x165

### WEIGHT

750 - KG = 10  
1500 - KG = 18  
2250 - KG = 25

### EXTINGUISHING AGENT

N2 = NITROGEN  
TEMP = AMBIENT

### TEMPERATURE RANGE

°C = 0 to 54  
°F = 32 to 129

### GAS MASS (VOLUME)

750 - KG = 0.9 / 1.98 lbs  
1500 - KG = 1.8 / 3.96 lbs  
2250 - KG = 2.7 / 5.95 lbs

### PROTECTED VOLUME

750 - M<sup>3</sup> = 1.5 (Class A)  
1500 - M<sup>3</sup> = 3.0 (Class A)  
2250 - M<sup>3</sup> = 4.5 (Class A)

### OUTPUT PRESSURE

BAR = 5-10

### LIFETIME GENERATOR

YEARS = 10

### ADR/UN

CLASS UN-USED = 9  
UN 3268  
  
CLASS USED = 9  
UN 3363 (Exempt)

### PROTECTION RATING

ENCLOSURE CLASS = IP30  
ELECTRIC BOX CLASS = IP55  
GENERATOR CLASS = IP67

### VOLTAGE (MAINS)

V = 110/230AC

### BATTERY LIFETIME BACK-UP POWER

LIFETIME = 2 YRS  
HRS = 12

### LINEAR HEAT CABLE FIRE DETECTION

Included in the mounting kit  
68 °C    104 °C  
154 °F    219 °F

### GAS OUTPUT NOISE LEVEL

< 99 dB with silencer (opt.)  
127 dB without silencer

### DESIGN CONCENTRATION


% = 40.3 Class A  
% = 45.2 Higher Hazard Class A

## CONTACT INFORMATION

**EXXFIRE B.V.**  
Keyerswey 30  
2201 CW Noordwijk  
The Netherlands

Tel: +31 (0)85 4017 970  
Email: info@exxfire.com  
Website: www.exxfire.com  
CC: 53952464  
VAT: NL.8510.87.425.B01

# EXXFIRE TW

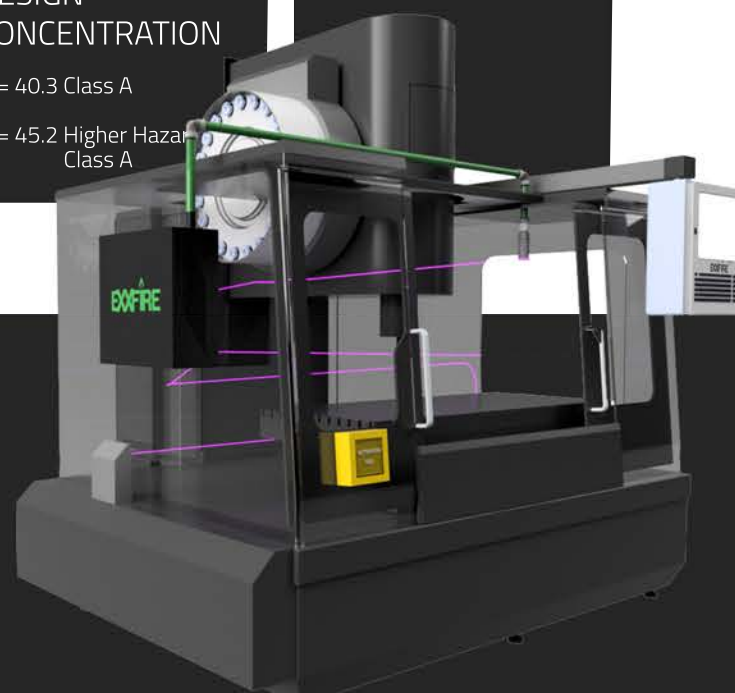

**NITROGEN FIRE SUPPRESSION**

**MAINTENANCE FREE**

**LINEAR HEAT CABLE DETECTION**



0080.P1.16.0106



MEMBER