

Analogue EN Control Unit

Alarmline II Series



Overview

The AlarmLine II Analogue EN Linear Heat Detection (LHD) system comprises of AlarmLine II Analogue EN Linear Heat Detection (LHD) sensor cable (AAE-xxxx), a AlarmLine II Analogue EN Controller

(AAECU) and a AlarmLine II Analogue EN end of line unit (AAECU-EOL). The controller provides monitoring of the AlarmLine II Analogue EN range of LHD sensor cable, configuration of alarm and pre-alarm temperatures as well as enabling simple interface to a main fire alarm or BMS system..

Interface and Programming

The AAECU provides LED indications as well as a LCD. Internal pushbuttons allow for easy configuration without the need for a PC. Configuration via PC is also supported via a USB connection and the optional configuration software AAECU-PCC.

Pre-Alarm and Alarm thresholds can be set through simple menu options. Initial set-up is done by measuring and entering the calibration resistance of the sensor cable, as well as the 3 letter cable parameter identifier.

Volt free changeover contacts are provided inside the control unit for Pre-Alarm and Alarm signaling to a main fire alarm control panel or BMS system. A failsafe opto-isolated phototransistor fault output is also provided.

No user controls are provided on the control unit. An isolated input is provided enabling remote reset functionality..

Operation

As well as monitoring the LHD sensor cable for changes in temperature, the control unit also monitors for open and short circuit faults along the cable ensuring notification if the cable becomes damaged. It is fitted with its own internal temperature monitor and should the temperature within the controller enclosure reach 100°C (212°F), an alarm will be signaled.

Each control unit may have up to 500m (1640ft) of LHD sensor cable connected to it, acting as a single detection zone. detection per control unit. The controller is compatible with any conventional or addressable fire alarm panel or other building management system.

Details

The AAECU is supplied with an End-Of-Line unit (AAECU-EOL) included. The End-Of-Line unit (AAECU-EOL) is also available separately as a spare part.

A junction box (AAECU-JUN) is also available separately, if two pieces of cable needs to be joint.

Standard Features

- VdS EN54-22:2015/prA1:2007. EN54-22 is a referenced standard in AS 1670.1
- Up to 500m of sensor cable per zone
- Separate pre-alarm and alarm signals
- Easy programmable interface
- Enclosure temperature alarm
- IP65 rated enclosure



Australia & New Zealand

Phone: 1800 672 171
 Outside Australia: +61 3 9518 5588
 Email: firesecuritycs@carrier.com
 Web: www.kidde.com.au

Head Office

10 Ferntree Place
 Notting Hill, Victoria 3168
 Australia

© 2020 Carrier. All rights reserved.
 Kidde Australia is a Carrier company.

Specifications

General

Status indication	4 x LED's (power, fault, pre-alarm & alarm)
User interface	LCD display with internal configuration buttons
Reset voltage	5-28 VDC for minimum
Connectivity	2-wire RS-485 Modbus RTU or ASCII

Electrical

Power supply type	External
Power consumption	2 W maximum
Operating voltage	20 to 30 VDC
Current consumption	39 mA at 30 VDC

Detection

Detection principle	Heat - Classes A11/A21 & BI
Alarm temperature (maximum)	+100°C
Alarm temperature (minimum)	+54°C

Input

Input quantity	1 for remote reset
Input type and rating	5-28 VDC (at 2 mA) for a minimum 3 seconds

Output

Output quantity	3 for fault, pre-alarm and alarm
Output type and rating	Pre-alarm and alarm; relay with NO/NC/C connections (2 A at 30 VDC), Fault : NC opto-isolated phototransistor output

Physical


Physical dimensions	Controller : 182 x 180 x 90 mm (7 1/8" x 7 1/8" x 3 1/2") (W x H x D) EOL unit : 100 x 60 x 35 mm (4" x 2 3/8" x 1 3/8") (W x H x D)
Net weight	Controller : 860 g / EOL unit : 115 g
Colour	Light grey
Mounting type	Surface mount, Wall mount
Material (body)	Polycarbonate

Environmental

Operating temperature	Controller : -20 to +50°C / EOL unit : -40 to +125°C
IP rating	Controller : IP65 (IK08) / EOL unit : IP65

Standards and regulation

Certification	CE, EN54-22, VdS
---------------	------------------

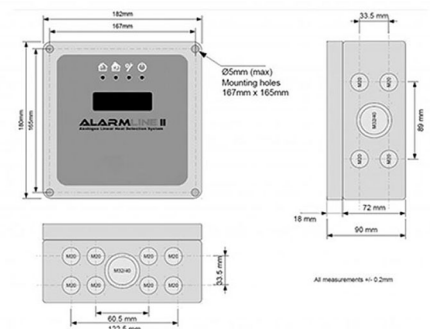

Ordering information

Part number	Description
AAECU	Alarmline II Analogue EN Control Unit